


## 11 Disassembly and Reassembly

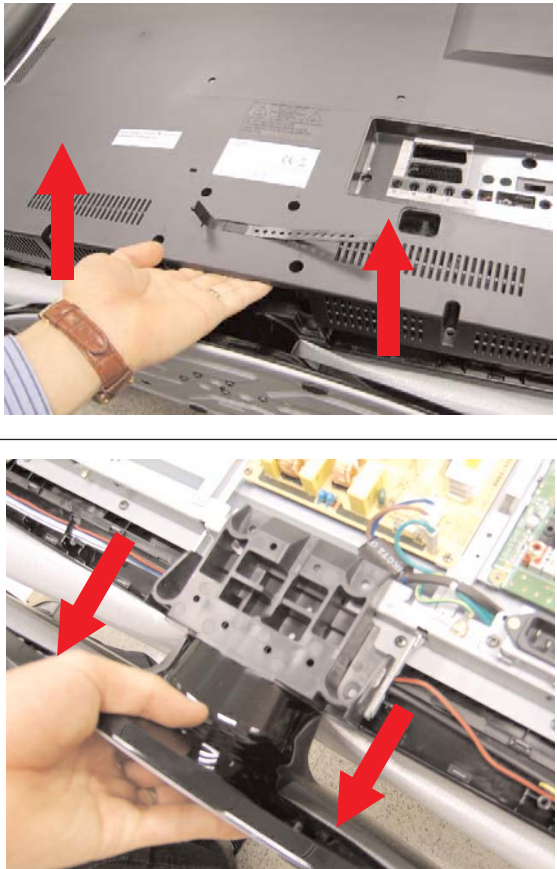
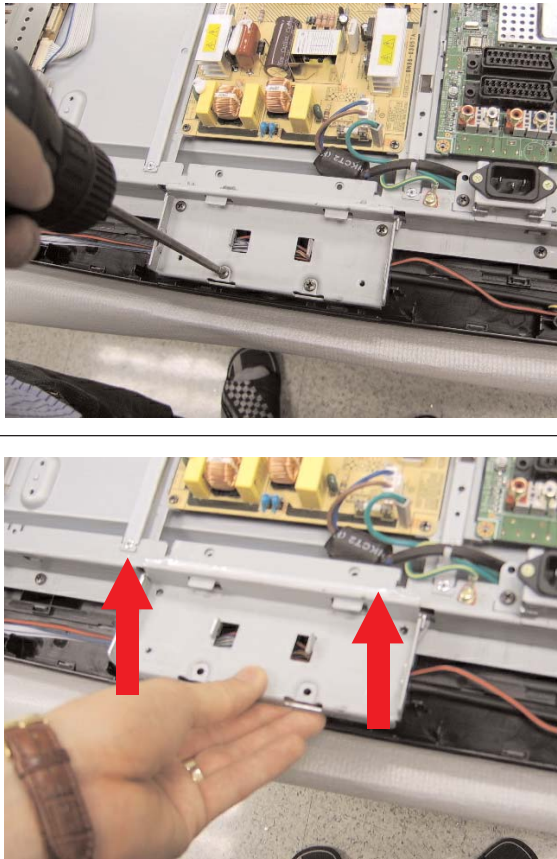
This section of the service manual describes the disassembly and reassembly procedures for the TFT-LCD TV.

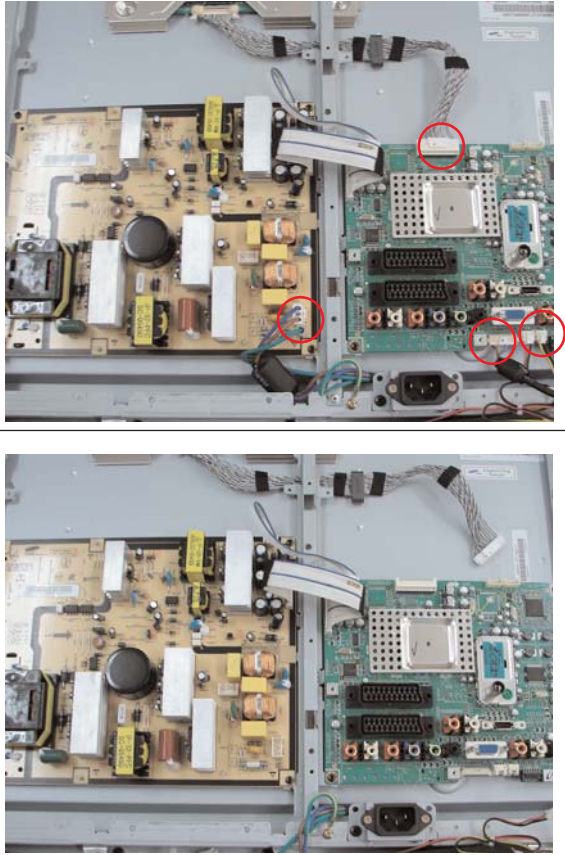
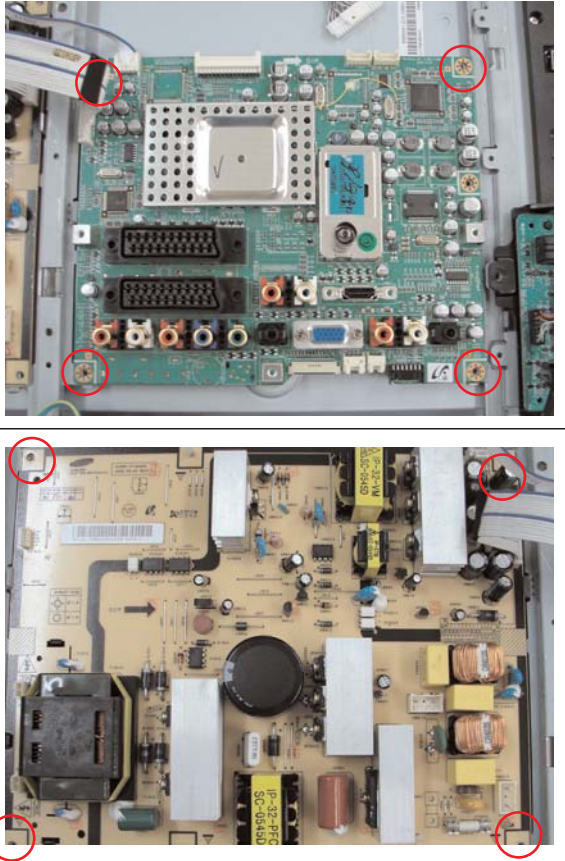
**⚠ WARNING :** This monitor contains electrostatically sensitive devices. Use caution when handling these components.

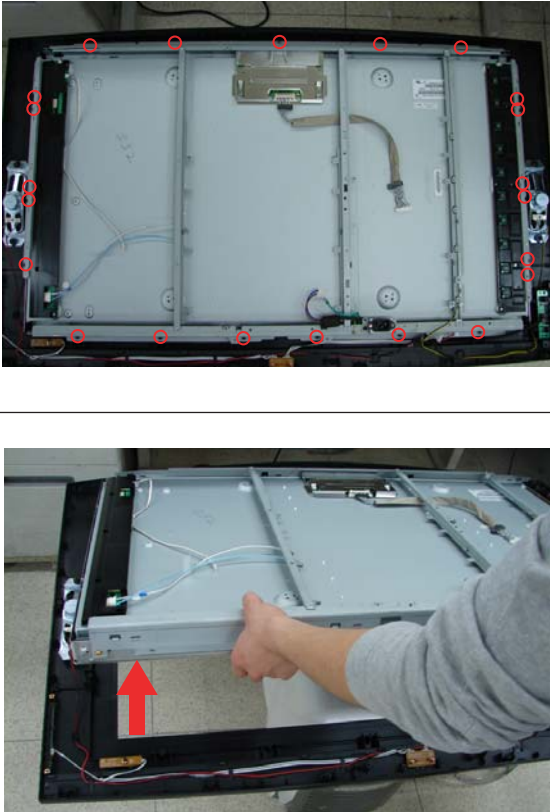
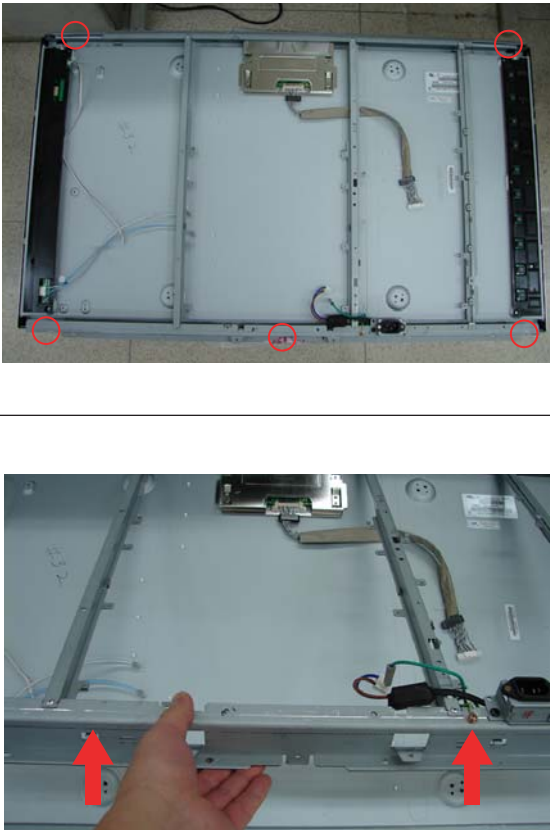
### 11-1 Disassembly


**⚠ Cautions :** 1. Disconnect the monitor from the power source before disassembly.  
2. Follow these directions carefully; never use metal instruments to pry apart the cabinet.

Description	Picture Description
<p>1. Place monitor face down on cushioned table. Remove screws from the rear cover. Remove screws from the stand.</p>	 <p>The top photograph shows the back of a grey TFT-LCD TV monitor with its black stand. The bottom photograph is a close-up of the rear cover, showing a hand using a screwdriver to remove one of four screws. Each screw location is highlighted with a red circle. The screws are located on the rear cover: two on the left side and two on the right side, near the bottom edge.</p>

Description	Picture Description
<p>2. Lift up the rear cover and remove the stand.</p>	 <p>The top photograph shows a person's hand lifting the rear cover of the device. Two red arrows point upwards from the bottom edge of the cover, indicating the direction of movement. The bottom photograph shows the stand being detached from the chassis. Three red arrows point downwards from the stand, indicating its removal.</p>
<p>3. Remove Screws from the stand BRKT and lift up the stand BRKT.</p>	 <p>The top photograph shows a screwdriver being used to remove a screw from the stand bracket. The bottom photograph shows the stand bracket being lifted up. Two red arrows point upwards from the bottom of the bracket, indicating the direction of movement.</p>

Description	Picture Description
<p>4. Disconnect cable from the boards.</p>	 <p>The top photograph shows a green printed circuit board (PCB) with various components. A red circle highlights a cable connector on the right side. Another red circle highlights a power jack at the bottom right. A third red circle highlights a connector on the left side. The bottom photograph shows the same green PCB from a slightly different perspective, with red circles highlighting the power jack and another connector on the right side.</p>
<p>5. Remove screws from the boards and lift up the boards.</p>	 <p>The top photograph shows a close-up of the green PCB. Four screws are circled in red: one at the top left, one at the top right, one at the bottom left, and one at the bottom right. The bottom photograph shows a close-up of a yellow PCB. Four screws are circled in red: one at the top left, one at the top right, one at the bottom left, and one at the bottom right.</p>

Description	Description Picture
<p>6. Remove screws and Lift up the Lcd panel.</p>	
<p>7. Remove 5 screws from the BRKT. Lift up the BRKT.</p>	

Description	Description Picture
	

## 11-2 Reassembly

---

Reassembly procedures are in the reverse order of disassembly procedures.

## Memo